


**JIN ZON ENTERPRISE CO., LTD.**

4F-3, No. 171, Sec. 2, Chang An E. Rd.,  
 Taipei, Taiwan, R. O. C.  
 TEL: 886-2-27111093~5  
 FAX: 886-2-27310902  
 E-mail: [jinzon@ms2.hinet.net](mailto:jinzon@ms2.hinet.net)  
 Http:// [www.jinzon.com.tw/](http://www.jinzon.com.tw/)

**Reed switch ZW-210**

This product is in accordance with RoHs

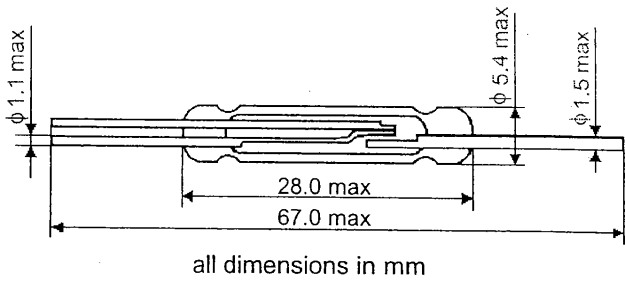

PARAMETERS	Unit	TYPE
		<b>ZW-210</b>
Contact form		change over (type C)
Contact material		Ru
Switching power	max W,VA	30
Switching current	max A	1
Switching voltage	max V <sub>DC</sub>	200
Pull-in Ampere turns	AT	70 ÷ 120
Contact resistance	max mΩ	150
Operate time incl. bounce time	max ms	2.5
Release time	max ms	1.5
Breakdown voltage	min V <sub>DC</sub>	350
Capacitance NC / NO	max pF	2.0 / 1.0
Insulation resistance NC / NO	min Ω	5x10 <sup>8</sup> / 1x10 <sup>9</sup>
Resonant frequency	min Hz	2200
Environment category acc. to IEC 68-1		55/100/10
Operating life tested with resistive loads		5x10 <sup>5</sup> operations 1x10 <sup>5</sup> operations
Load 30 V <sub>DC</sub> , 100 mA		
Load 60 V <sub>DC</sub> , 200 mA		
Test coil		CP-11
- No. of turns		10000 φ 0.09
- Dimensions	mm	φ 7.6 x 50
- Resistance	Ω	850
		acc. Polish Standard PN-75/T-04400